



VOLT X ENERGY HOME BATTERY SYSTEM

40 kWh Battery & Single-Phase 10 kW Inverter



10-Year Product & Performance Warranty

Every VoltX Energy Home Battery System comes backed by a comprehensive warranty for your peace of mind.



High-Capacity LiFePO4 Storage

Stackable energy storage modules to meet your household's energy demand, all backed by advanced lithium iron phosphate technology.



Flexible Installation Options

Wall or floor mounting with IP protection (model dependent) for versatile and secure installation.



Advanced Battery Management System (BMS)

Integrated cell-level monitoring and balancing enhances safety, extends battery life, and maintains consistent performance.



UPS-level Protection

Backup protection that shields against surges, spikes, and unexpected blackouts for continuous, reliable energy.



Smart Monitoring

Track your battery and inverter performance in real time via user-friendly monitoring platform for enhanced control and convenience.




Solar-Ready Hybrid Design

Compatible with on-grid or off-grid solar setups using the VoltX Energy hybrid inverter, enabling smooth UPS-level switching.



Low-Maintenance Operation

Designed for residential use with low noise output and minimal maintenance requirements for a hassle-free experience.

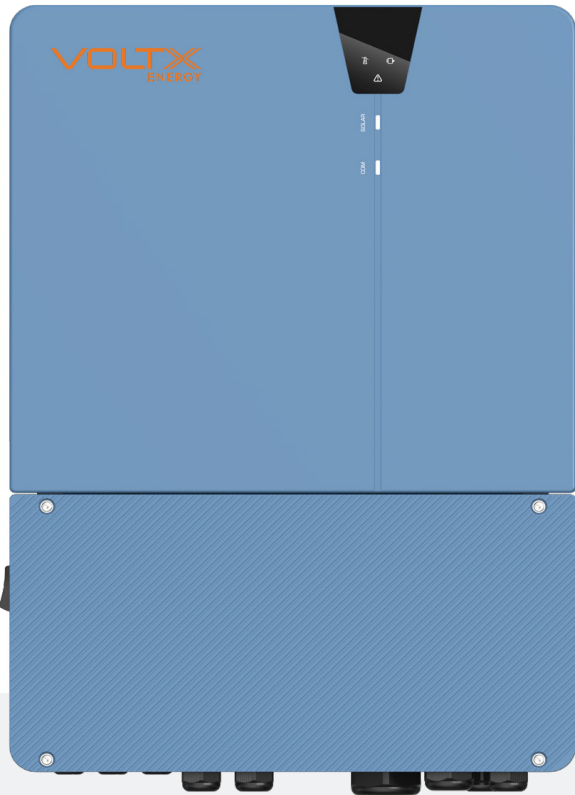

Single-phase hybrid inverters 10 kW

ASW SH Series



Optimal performance

- 3 independent MPPTs for flexible and optimized large PV array design
- Max. 20 A input current per MPPT, ideal for bifacial and large area PV modules
- Up to 200% PV array oversizing for higher energy yields
- ShadeSol shadow management



Safe & reliable

- UPS-level switching time < 10 ms
- IP66 rated design for indoor and outdoor use
- Up to 200% power output for 10s during power outages
- Multi-source design for black start, integrating PV, battery, and generator



User-friendly

- Expandable up to 30 kW in on-grid and off-grid mode
- Compatible with both lead-acid and lithium batteries
- Smart setup, commissioning and monitoring via monitoring app

Technical Datasheet

Model	ASW008K-SH		ASW010K-SH	
Item				
PV Input Specification				
Max. PV array power	16000 Wp		20000 Wp	
Max. input voltage	550 V			
MPP voltage range / rated input voltage	40~530 V / 380 V			
Min. input voltage / start voltage	40 V/ 50 V			
No. of independent MPPT trackers / strings per MPPT input	3 / 1			
Max. input current per MPP tracker	20 A / 10000 W		20 A / 10000 W	
Max. short-circuit current per MPP tracker	25 A			
Battery input				
Battery voltage range	40 V to 60V			
Max. charge / discharge power	8000 W		10000 W	
Max. charge current / Max. discharge current	190 A		210 A	
Battery type	LiFePO4 / Lead-acid			
AC output				
AC voltage range / Nominal AC voltage	180 V to 280 V / 220, 230 V			
Rated AC grid frequency	50 Hz / 60 Hz			
AC grid frequency range	45~55 Hz / 55~65 Hz			
Rated apparent power	8000 VA		10000 VA	
Max. apparent power	8000 VA		10000 VA	
Rated grid output Current (@230V)	34.8 A		43.5 A	
Max. grid output current (@230 V)	38.3 A		47.8 A	
Harmonic distortion (THD) at rated output	< 3 % (of nominal power)			
Power factor at rated power / adjustable range	1 / 0.8 leading to 0.8 lagging			
AC input				
Nominal AC voltage	220, 230, 240, L/N			
Rated grid frequency	50 Hz / 60 Hz			
Max. input power from grid	16000 W		18000 W	
Max. input current from grid	69.6 A		78.3 A	
EPS output				
Nominal AC voltage	220, 230, 240, L/N			
Nominal output frequency	50 Hz / 60 Hz			
Rated apparent power	8000 VA		10000 VA	
Peak output apparent power (off-grid up to 10s)	16000 VA		20000 VA	
Rated current (@230 V)	34.8 A		43.5 A	
Max. current (@230 V, continuous on-grid / off-grid)	38.3 A		47.8 A	
Max. switch time	< 10 ms			
Output THDv (@ Linear load)	2%			
Generator side				
Max. input apparent power	8000 VA		10000 VA	
Max. charge / discharge power	8000 VA		10000 VA	
Max. input current	36.4 A		45.5 A	
Rated AC voltage	220, 230, 240, L/N			
Rated AC frequency	50 Hz / 60 Hz			
Efficiency				
MPPT efficiency	99.90%			
European efficiency / Max. efficiency	97 % / 97.6 %			

Technical Datasheet

Model		ASW008K-SH	ASW010K-SH
Item			
Safety protection			
Surge protection		● / Type	
Insulation resistance detection		II ●	
PV string input reverse polarity protection		●	
Ground fault monitoring		●	
Residual current monitoring unit		●	
AC short circuit protection		●	
Anti-islanding protection		●	
General data			
Dimensions (W / H / D)		484 / 679 / 230 mm	
Device weight		34.5 kg	
Operating temperature range		-25 °C ~ +60 °C	
Cooling concept		Smart cooling	
Degree of protection (as per IEC 60529)		IP66	
Max. relative humidity		100%	
Max. operating altitude		3000 m	
Features			
User interface		LED & App	
BMS interface		CAN	
Communication interfaces		Dongle: WiFi (2.4 GHz) / LAN (100 Mbps) Inverter: RS485 (ModBus RTU), LAN (100Mbps, Modbus TCP only)	
Digital output (dry contact) / No. of outputs		● / 2	
Digital input (dry contact) / No. of inputs		● / 6	
Integrated power control / export power control		● / ●	

● Standard features / ○ optional features / – not available

Up to 50 kWh Battery

Ai-LB-G3 Series



Optimal performance

- Low self and standby consumption
- Enhanced SOC measurement accuracy for optimal battery management
- Supports up to 1C charge / discharge rate



Safe & reliable


- IP66 rated design for indoor and outdoor use
- Designed in accordance with global safety standards
- Integrated fire suppression system
- Smarter and safer battery management system for precise diagnostics
- Integrated MOSFET and dual fuse protection for superior safety and reliability.



User-friendly

- Stackable up to 5 batteries
- Elegant design with concealed cable management
- Compact, lightweight modules for easier handling and installation
- 5 selections for operating (LED) indicator via monitoring app

Technical Datasheet

Item	Model
System Data	
Module	4
	
Cell type	LiFePO4
Rated capacity	100 Ah
Nominal energy ¹	20.48 kWh
Usable energy ²	19.45 kWh
Nominal battery voltage	51.2 V
Battery voltage range	40 V ~ 58.4 V
Recommended charge / discharge current	210 A
Max. charge / discharge current	210 A
Rated charge / discharge power	10.75 kW
Max. charge / discharge power	10.75 kW
General Data	
Dimensions (W / D / H)	630 / 185 / 1280 mm
Module weight	184.0 kg
Base weight	2.6 kg
Installation location	Indoor / Outdoor
Mounting method	Floor mounted / Wall mounted
Operating temperature range	Charging: -8 °C ~ 58 °C Discharging: -18 °C ~ 58 °C
Storage temperature range	-20°C ~ 60°C
Cooling concept	Natural convection
Protective class	II
Degree of protection	IP66
Relative humidity	0 % ~ 95 % RH, non-condensing
Max. operating altitude	4000 m (> 3000 m derating)
Communication	CAN
Certification	IEC 62619, IEC 62040, IEC 62477, IEC 63056, IEC 61000
Life cycle ³	6000 times
Round-trip efficiency	≥ 95 %


1. Nominal energy is defined under the following conditions: battery voltage 40 ~ 58.4 V, 0.5C charge & discharge at +25°C.

2. Usable energy is defined under the following conditions: 0.5C charge & discharge at +25°C, 95% DOD.

3. Life cycle is defined under the following conditions: 0.5C charge & discharge at 25°C (One cycle a day), 90% DOD, 70% EOL.

Smart cloud-based monitoring system

Cloud & App

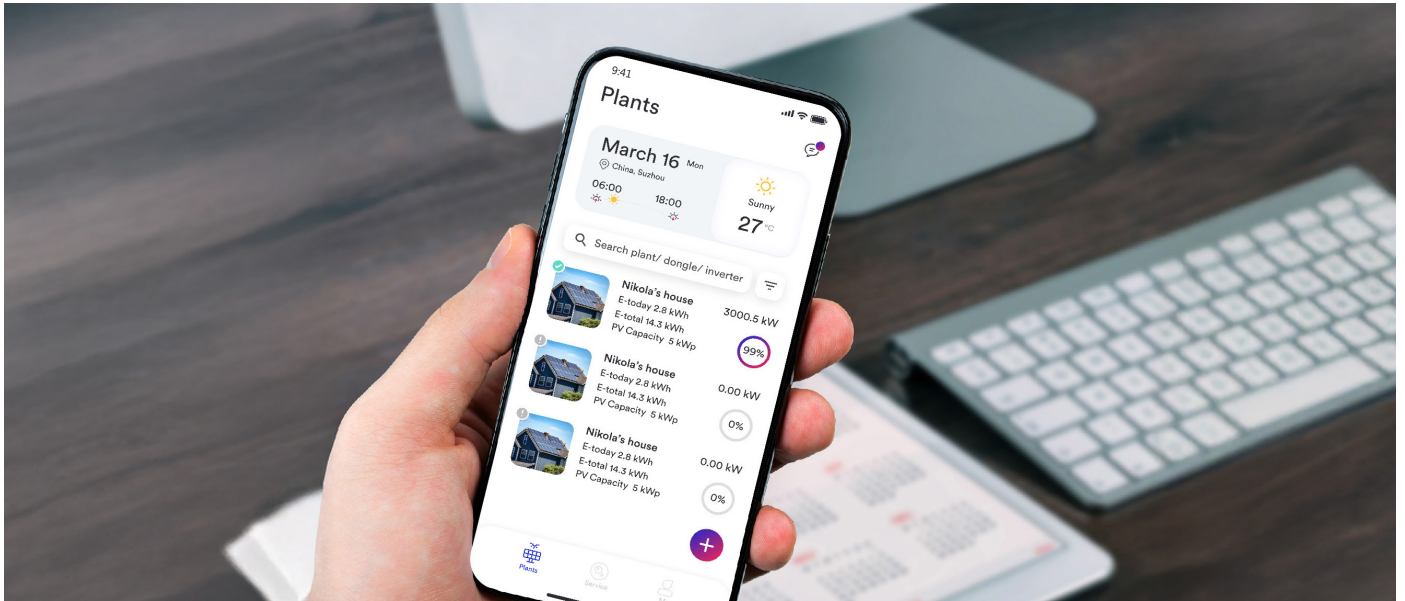

Easy-to-install

- Quick setup and commissioning of VoltX Energy inverters
- Quick active/reactive and export power control setup
- Available on Android and iOS devices and accessible via web browsers

Reliable

- Cloud-based monitoring system
- Centralized management of all plant data

User-friendly

- Intuitive navigation
- Clear readability of key plant data
- Performance reports sent via email

DOWNLOAD THE APP NOW



VOLTXX
ENERGY

 www.voltxenergy.com.au